



U.S. Forestry Approved Spark Arrestors

- Available in Inlet Pipe Sizes from 2" - 5"
- Certified for Horizontal Installations
- Durable Aluminized Steel
- Reduce Fire Hazards



Reduce Fire Hazards

Dynaflex Products certified spark arrestors remove nearly all dangerous sparks from the exhaust gases eliminating any fire hazards caused by internal combustion engines. Fire causing sparks are moved through the unit and forced into a designated arrestor chamber.

Durability Plus Light Weight

Each unit is constructed of aluminized steel throughout. Critical internal flanges are heavy gauged for longer service life, while the outer shell is lighter weight to reduce stress and vibration to the rest of the exhaust system. Aluminized steel is used to resist heat, corrosive gases, and to extend service life of arrestor.

Two Way Performance

Dynaflex Spark Arrestors are certified for horizontal installations, with efficiencies that exceed 95%. C F M ratings are outlined on the back page.




**DYNAFLEX
PRODUCTS®**



Spark Arrestors

How To Select The Proper Arrestor

If diameter of the spark arrestor is as large as the exhaust pipe in diameter, restriction usually will be within acceptable engine limits. However, you should check exhaust C F M of engine against C F M rating of spark arrestor. Some applications (eg. turbo charged engines) may require larger spark arrestors and an adaptor will be needed to complete installation.

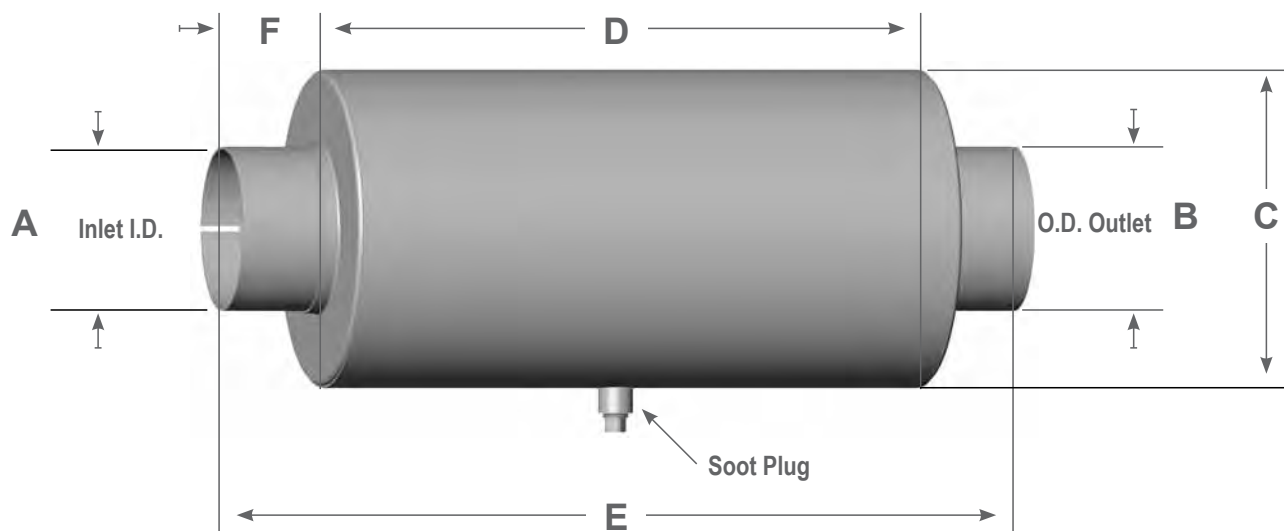

Part No.	A	B	C	D	E	F	Rated CFM
	Inlet DIA.	Outlet DIA.	Body DIA.	Body Length	Overall Length	Inlet Length	
86-200AZ	2.00	2.00	6.13	8.00	11.63	1.63	208
86-250AZ	2.50	2.50	6.13	9.75	14.00	2.25	348
86-300AZ	3.00	3.00	6.13	11.75	16.63	2.50	555
86-350AZ	3.50	3.50	8.00	12.25	18.13	3.00	767
86-400AZ	4.00	4.00	8.00	15.75	20.63	2.50	1312
86-500AZ	5.00	5.00	10.13	17.13	24.25	3.56	2080

All arrestors exceed U.S. Forestry requirements.

Models are qualified and tested for horizontal installations by the U.S. Forestry Service.



For more detailed (AN#030712-010201DP) Spark Arrestors flyer use a QR-code reading scanner. You will be directed to an online download center.

6466 Gayhart St.,
Commerce, CA 90040

T (323) 724-1555
F (323) 724-2999

